
APC Smart-UPS On-Line, 1500VA, Rackmount 2U, 230V, 8x C13 IEC outlets, Network Card, W/ rail kit, Used W/O Lithium-ion external battery, Double-conversion (Online), 1.5 kVA, 1350 W, Sine, 80 V, 240 V

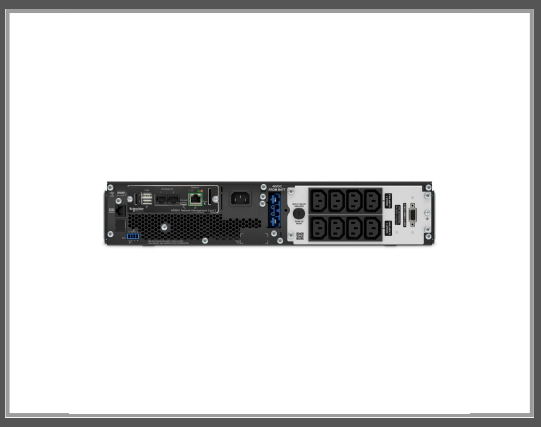

Smart-UPS On-Line - 1500VA - Rackmount 2U - 230V - 8x C13 IEC outlets - Network Card - W/ rail kit - Used W/O Lithium-ion external battery

Group	Power Supply
Manufacturer	APC
Manufacturer item no.	SRT1500UXI-NCLI
EAN/UPC	0731304338727

Description

This APC Smart-UPS is designed for IT professionals or network administrators to maintain business uptime and continuity. This 1500VA on-line 2U rackmount UPS provides pure sine wave power and extended runtime to support critical electronics during power disruptions. It comes with 1x IEC 320 C14 input and 8x IEC 320 C13 outlets. The UPS has a preinstalled Network Management Card for UPS network-based monitoring and management. The UPS comes with PowerChute Network Shutdown that provides graceful shutdown of physical servers, virtual machines, and HCI clusters. The UPS can connect to EcoStruxure IT or third-party centralized management platforms. The UPS has a 5-year warranty, and has to be used with an external Lithium-ion battery sold separately.

Main features

	General
UPS topology	Double-conversion (Online)
Output power	1350 W
AC outlet types	C13 coupler, C14 coupler
AC outlets quantity	8 AC outlet(s)
Battery replacement accessibility	End-user
Form factor	Rackmount
Product colour	Black
Rack capacity	2U
Compliance certificates	RoHS, REACH, WEEE
Certification	CE; EAC; RCM; VDE; UK PSTI

Extended details

	Features

UPS topology	Double-conversion (Online)
Output power capacity	1.5 kVA
Output power	1350 W
Waveform	Sine
Input operation voltage (min)	80 V
Input operation voltage (max)	240 V
Input frequency	40 - 70 Hz
Output operation voltage (min)	220 V
Output operation voltage (max)	240 V
Output frequency	50/60 Hz
Surge energy rating	340 J
Heat dissipation	450 BTU/h
Number of input phases	1
Number of output phases	1
Single-phase input voltage supported	230 V
Crest factor	3:1
Output voltage Total Harmonic Distortion (THD)	2%
Noise level	50 dB
	Design
Form factor	Rackmount
Product colour	Black
Rack capacity	2U
International Protection (IP) code	IP20
	Battery
Battery replacement accessibility	End-user
	Ports & interfaces
AC outlet types	C13 coupler, C14 coupler
AC outlets quantity	8 AC outlet(s)
USB port	Yes
Serial ports quantity	1
Ethernet LAN (RJ-45) ports	1
Emergency Power Off (EPO) connector	Yes
SmartSlot	Yes
	Operational conditions
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C

Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3048 m
Non-operating altitude	0 - 15240 m
	Other features
Input connection type	IEC 60320 C14
Output connection type	8 IEC 60320C13
Output voltage	230 V
Mounting	vertical
	Weight & dimensions
Width	432 mm
Depth	590 mm
Height	85 mm
Weight	17.5 kg
	Technical details
Packaging recycled materials	Recycled cardboard
Preferred mounting position	no preference
Sustainable packaging	No
SCIP number	a64c500c-f72a-458b-8faa-8175a94429fe
Take-back system	No
Packaging without single use plastic	No
	Certificates
Waste Electrical and Electronic Equipment (WEEE) compliance	Yes
Compliance certificates	RoHS, REACH, WEEE
Certification	CE; EAC; RCM; VDE; UK PSTI
	Logistics data
Customs product code (TARIC)	8504409590
Total carbon footprint (kg of CO2e)	5080.4653094521
	Packaging data
Package width	810 mm
Package depth	600 mm
Package height	245 mm
Package weight	28.2 kg