


D-Link DGS 1210-52 - Switch - 48 x 10/100/1000 + 4 x SFP

desktop - rack-mountable - AC 100/230 V

Group	Network Equipment
Manufacturer	D-Link
Manufacturer item no.	DGS-1210-52/E
EAN/UPC	790069467790

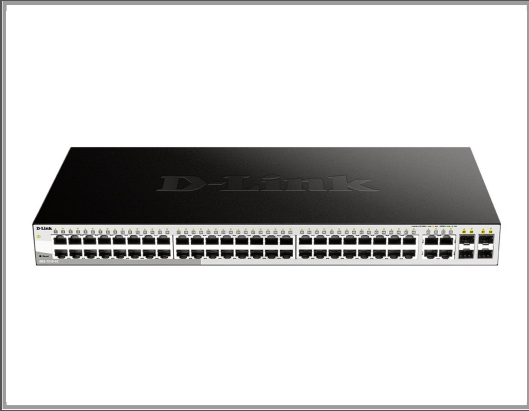

Description

D-Link DGS 1210-52 - Switch - 48 x 10/100/1000 + 4 x SFP - desktop, rack-mountable - AC 100/230 V

Main features

Product Description	D-Link DGS 1210-52 - switch - 48 ports - rack-mountable
Device Type	Switch - 48 ports
Enclosure Type	Rack-mountable 1U
Subtype	Gigabit Ethernet
Ports	48 x 10/100/1000 + 4 x SFP
Performance	Switching capacity: 104 Gbps Forwarding performance (64-byte packet size): 77.4 Mpps
Capacity	IGMP groups: 256 Port queues: 4
MAC Address Table Size	16K entries
Routing Protocol	IGMP, IGMPv2
Remote Management Protocol	TFTP, Telnet, SNMP 1, SNMP 2c, SNMP 3, RMON 1, CLI
Features	Auto-negotiation, flow control, full duplex mode, half duplex mode, auto-uplink (auto MDI/MDI-X), store and forward, 1MB packet buffer, Layer 2 switching, IGMP snooping, STP support, RSTP support, port mirroring, Multicast filtering function, LLDP support, QoS, WRR queuing, CoS, DSCP support, ToS, IPv6 support, bandwidth control, ACL support, IPv4 support, Port Security, Broadcast Storm Control, Multicast Storm Control, Unicast Storm Control, Safeguard Engine, ARP support, DHCP snooping, 802.1x authentication, Cable Diagnostics Function, MIB, SNMP trap, TFTP support, BOOTP support, DHCP client, Syslog support, SNMP support, TFTP client, SNTTP support, D-Link Green Technology
Compliant Standards	IEEE 802.3, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3u, IEEE 802.1D, IEEE 802.1w, IEEE 802.3ad (LACP), IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x
Power	AC 100/230 V (50/60 Hz)
Dimensions (WxDxH)	44 cm x 25 cm x 4.4 cm
Weight	4.1 kg

