


Eaton Network Card-M3 - Remote management adapter

Gigabit Ethernet x 1

Group	UPS Accessories
Manufacturer	Eaton
Manufacturer item no.	NETWORK-M3
EAN/UPC	0786689779566

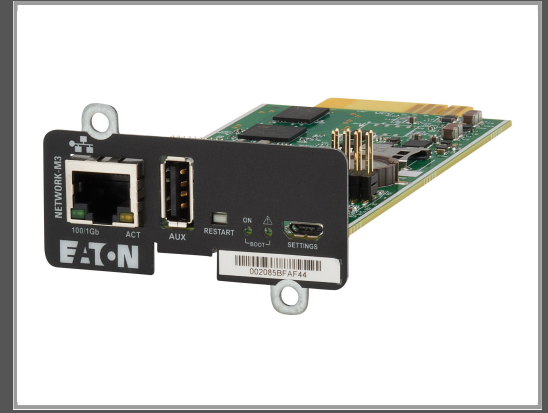

Description

Eaton's Gigabit Network Card (Network-M3) UPS connectivity device expertly blends comprehensive power management with expert cybersecurity. The M3 version builds on innovations with a zero-trust architecture that makes it even more effective at protecting mission-critical systems in medium-sized and enterprise IT networks. The Gigabit Network Card is compatible with multiple Eaton power management software solutions, allowing extensive automation and remote management and control that shortens response times to power issues. The Gigabit Network Card gives IT managers actionable intelligence for proactively addressing power problems before they turn into downtime, and for maximizing the efficiency of their power operations.

Main features

Product Description	Eaton Network Card-M3 - remote management adapter - Gigabit Ethernet x 1
Device Type	Remote management adapter
Form Factor	Plug-in module
Ports	Gigabit Ethernet x 1
Dimensions (WxDxH)	6.6 cm x 13.5 cm x 4.1 cm
Weight	65 g
Cabling Type	Ethernet 10Base-T, Ethernet 100Base-TX, Ethernet 1000Base-T
Data Link Protocol	10Mb LAN, 100Mb LAN, 1GbE
Network / Transport Protocol	ARP, BOOTP, DHCP

Extended details

General	
Device Type	Remote management adapter
Form Factor	Plug-in module
Networking	
Ports	Gigabit Ethernet x 1
Connectivity Technology	Wired
Cabling Type	Ethernet 10Base-T, Ethernet 100Base-TX, Ethernet 1000Base-T
Data Link Protocol	Ethernet, Fast Ethernet, Gigabit Ethernet
Network / Transport Protocol	ARP, BOOTP, DHCP

Remote Management Protocol	SNMP 1, SNMP 3, SNMP 2c, HTTP, SSH, CLI, NTP, SMTPS, LDAP, RADIUS, Syslog, TLS, MQTTS
Features	Firewall protection, E-mail alert, IPv6 support, firmware upgradable, reset button, IPv4 support, environmental monitoring, Management Information Base (MIB) II, secure boot, auto-shutdown, REST API interface, password authentication, LED status indicators, virtual machine awareness
	Expansion / Connectivity
Interfaces	1 x 1000Base-T - RJ-45 1 x auxiliary - 4 pin USB Type A 1 x management (USB)
	Miscellaneous
Compliant Standards	UL 2900-1, IEC 62443-4-2
	Dimensions & Weight
Width	6.6 cm
Depth	13.5 cm
Height	4.1 cm
Weight	65 g
	Environmental Parameters
Min Operating Temperature	0 °C
Max Operating Temperature	40 °C
Humidity Range Operating	- 95% RH (non-condensing)

Technical data © 1WorldSync. Subject to technical modifications and errors.