


HPE Aruba Instant On 1430 26G 2SFP Switch

Switch - unmanaged - 26 x 10/100/1000 + 2 x 100/1000 SFP - desktop
 - rack-mountable - wall-mountable - BTO

Group	Network Equipment
Manufacturer	HPE
Manufacturer item no.	R8R50A#ABB
EAN/UPC	0190017602646

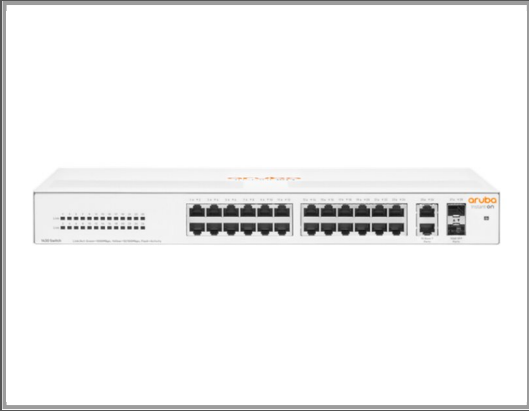

Description

HPE Aruba Instant On 1430 26G 2SFP Switch - Switch - unmanaged - 26 x 10/100/1000 + 2 x 100/1000 SFP - desktop, rack-mountable, wall-mountable - BTO

Main features

Product Description	HPE Aruba Instant On 1430 26G 2SFP Switch - switch - 26 ports - unmanaged - rack-mountable
Device Type	Switch - 26 ports - unmanaged
Enclosure Type	Rack-mountable 1U
Subtype	Gigabit Ethernet
Ports	26 x 10/100/1000 + 2 x 100/1000 SFP
Performance	Throughput: 41.68 Mpps Switching capacity: 56 Gbps Latency (100 Mbps): 5.2 µs Latency (1 Gbps): 2.9 µs
Capacity	MAC address entries: 16384
MAC Address Table Size	16384 entries
Jumbo Frame Support	9216 bytes
Features	Flow control, auto-sensing per device, MDI/MDI-X switch, wall mountable, Spanning Tree Protocol (STP) support, fanless, 12MB packet buffer, VoIP support, DiffServ Code Point (DSCP) support
Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3i, IEEE 802.3z, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3x, IEEE 802.3az
Power	AC 100-240 V (50/60 Hz) 0.4 A
Dimensions (WxDxH)	38.8 cm x 22.5 cm x 4.4 cm
Weight	2.27 kg
Localisation	English / Europe
Pricing Type	BTO

Extended details

General

Device Type	Switch - 26 ports - unmanaged
Enclosure Type	Desktop, rack-mountable, wall-mountable 1U
Subtype	Gigabit Ethernet
Ports	26 x 10/100/1000 + 2 x 100/1000 SFP
Performance	Throughput: 41.68 Mpps Switching capacity: 56 Gbps Latency (100 Mbps): 5.2 µs Latency (1 Gbps): 2.9 µs
Capacity	MAC address entries: 16384
MAC Address Table Size	16384 entries
Jumbo Frame Support	9216 bytes
Features	Flow control, auto-sensing per device, MDI/MDI-X switch, wall mountable, Spanning Tree Protocol (STP) support, fanless, 12MB packet buffer, VoIP support, DiffServ Code Point (DSCP) support
Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3i, IEEE 802.3z, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3x, IEEE 802.3az
Flash Memory	32 MB
Status Indicators	Port status, link/activity
Expansion / Connectivity	
Interfaces	26 x 10/100/1000 Base-T RJ-45 2 x 100/1000 SFP
Power	
Power Device	Internal power supply
Voltage Required	AC 100-240 V (50/60 Hz)
Electric Current Required	0.4 A
Power Consumption Stand by	8 Watt
Miscellaneous	
Included Accessories	Rack kit (2 post)
MTBF	171.9 years
Compliant Standards	EN 61000-3-2, IEC 61000-3-2, ICES-003 Class B, VCCI Class B, FCC CFR47 Part 15 B Class B, AS/NZS CISPR 32 Class B, IEC/EN 61000-4-3, IEC/EN 61000-4-4, IEC/EN 61000-4-5, IEC/EN 61000-4-6, IEC/EN 61000-4-8, IEC/EN 61000-4-11, IEC/EN 61000-4-2, CNS 13438 Class B, UL 62368-1 Second Edition, IEC/EN 60950-1:2006 +A11:2009 +A1:2010 +A12:2011 +A2:2013, UL 62368-1, EN 55032:2015 Class B, EN 55035, CISPR 35, CISPR 32:2015 Class B, IEC/EN 61000-3-3, IEC/EN 60825-1:2014 Class 2, IEC/EN 62368-1, UL 62368-1 Third Edition, CAN/CSA C22.2 No. 62368-1 Third Edition, CAN/CSA C22.2 No. 62368-1 Second Edition, KS C 9835, KS C 9832 Class B
Pricing Type	BTO
Localisation	English / Europe
Dimensions & Weight	
Width	38.8 cm
Depth	22.5 cm
Height	4.4 cm
Weight	2.27 kg
Manufacturer Warranty	

Service & Support	Limited warranty - lifetime Technical support - live chat - lifetime Technical support - phone consulting - 90 days from date of purchase
Environmental Parameters	
Min Operating Temperature	0 °C
Max Operating Temperature	40 °C
Humidity Range Operating	15 - 95% (non-condensing)
Min Storage Temperature	-40 °C
Max Storage Temperature	70 °C
Humidity Range Storage	15 - 90% (non-condensing)

Technical data © 1WorldSync. Subject to technical modifications and errors.