


Netgear GS748T - V6 - switch - L3 Lite

smart - 48 x 10/100/1000 + 2 x Gigabit SFP + 2 x combo Gigabit SFP - desktop - rack-mountable

Group	Network Equipment
Manufacturer	Netgear
Manufacturer item no.	GS748T-600EUS
EAN/UPC	0606449169218

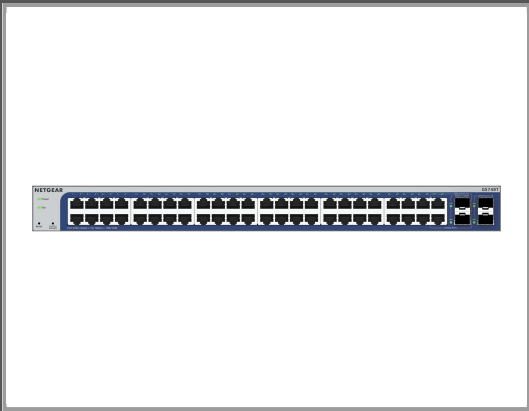

Description

NETGEAR GS748T - V6 - switch - L3 Lite - smart - 48 x 10/100/1000 + 2 x Gigabit SFP + 2 x combo Gigabit SFP - desktop, rack-mountable

Main features

Product Description	NETGEAR GS748T - V6 - switch - 48 ports - smart - rack-mountable
Device Type	Switch - 48 ports - L3 Lite - smart
Enclosure Type	Rack-mountable
Subtype	Gigabit Ethernet
Ports	48 x 10/100/1000 + 2 x Gigabit SFP + 2 x combo Gigabit SFP
Performance	Buffer memory: 2 MB Bandwidth: 100 Gbps
Capacity	Virtual interfaces (VLANs): 256 ARP table: 512 ACL entries: 100 Static routes: 32 Multicast groups: 512 DHCP snooping entries: 8000 DHCP static entries: 1024
MAC Address Table Size	16K entries
Jumbo Frame Support	9KB
Routing Protocol	IGMP, IGMPv2, IGMPv3, MLD, MLDv2
Remote Management Protocol	RMON 1, RMON 2, RMON 3, RMON 9, SNMP 2, SNMP 3, SNMP 4
Features	VLAN support, MLD snooping, static route, DoS attack prevention, 2 fans, auto video VLAN, auto voice VLAN, IGMP snooping, static routing, IPv6 support, IPv4 support, GVRP, Multicast VLAN routing, LLDP-MED, dual firmware images, DAI, MVR, WRR, packet storm protection, MAC lockdown, DiffServ support, password protection, IPv6 management
Compliant Standards	IEEE 802.3az, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3ad (LACP), IEEE 802.3x, IEEE 802.1D, IEEE 802.1w, IEEE 802.1s, IEEE 802.1ab (LLDP), IEEE 802.3, IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3ae, IEEE 802.1p
Power	Ac 100- 240 V (50 - 60 Hz)

Dimensions (WxDxH)	44 cm x 25.7 cm x 4.3 cm
Weight	3.46 kg
Localisation	Europe, United Kingdom

Technical data © 1WorldSync. Subject to technical modifications and errors.