


Netgear Smart S3300-52X - V3 - switch

L3 Lite - smart - 48 x 10/100/1000 + 4 x SFP+ - desktop - rack-mountable (380 W) - for P/N: AXM764-10000S - AXM765-10000S - G728TXPAV-10000S - G752TXPAV-10000S - GS752TXAV-10000S

Group	Network Equipment
Manufacturer	Netgear
Manufacturer item no.	GS752TX-300EUS
EAN/UPC	0606449173253

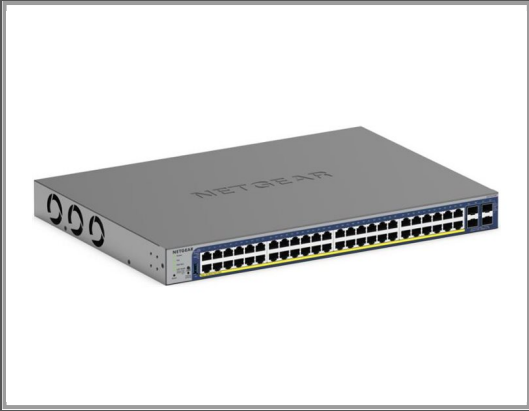

Description

NETGEAR Smart S3300-52X - V3 - switch - L3 Lite - smart - 48 x 10/100/1000 + 4 x SFP+ - desktop, rack-mountable (380 W) - for P/N: AXM764-10000S, AXM765-10000S, G728TXPAV-10000S, G752TXPAV-10000S, GS752TXAV-10000S

Main features

Product Description	NETGEAR Smart S3300-52X - v3 - switch - 48 ports - smart - rack-mountable
Device Type	Switch - 48 ports - L3 Lite - smart - stackable
Enclosure Type	Rack-mountable
Subtype	Gigabit Ethernet
Ports	48 x 10/100/1000 + 4 x SFP+
PoE Budget	380 W
Performance	Bandwidth: 176 Gbps Forwarding rate (64-byte packets): 130.9 Mpps
Capacity	Virtual interfaces (VLANs): 256 ACLs per system: 100 ARP entries: 512 IPv4 routes (static): 32 Packet buffer size: 12 MB IPv6 routes (static): 32 IGMP multicast groups: 512
MAC Address Table Size	16K entries
Jumbo Frame Support	10KB
Routing Protocol	IGMP, IGMPv2, IGMPv3, MLD, MLDv2
Remote Management Protocol	IPv4, IPv6, RADIUS, DHCP, SNMP 1, SNMP 2, SNMP 3, RMON 1, RMON 2, RMON 3, RMON 9, TCP/IP, UDP, HTTPS, TFTP, HTTP, Syslog

Features	3 fans, ACL support, QoS, IGMP snooping, MLD snooping, auto video VLAN, Auto VoIP, IEEE 802.1Q, GVRP, MAC based VLAN, Private VLAN, Protocol-based VLANs support, Voice VLAN, LLDP-MED, 802.1x authentication, VoIP support, VLAN support, CLI management, ACL MAC based, DSCP support, dual firmware images, cloud backup, store and forward, WRR, VLAN Tagging, IP subnet-based VLANs support, GVRP, GARP, Broadcast Storm Control, Multicast Storm Control, Unicast Storm Control, DHCP relay, DHCP client, DHCP snooping, ICMP IRDP, Link Aggregation, Guest VLAN, MAC lockdown, DAI, DoS protection, cable test
Compliant Standards	IEEE 802.3at, IEEE 802.3az, IEEE 802.1p, IEEE 802.1Q, IEEE 802.3ad (LACP), IEEE 802.3x, IEEE 802.1D, IEEE 802.1w, IEEE 802.1s, IEEE 802.1ab (LLDP), IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.1x, IEEE 802.3af
Dimensions (WxDxH)	44 cm x 25.7 cm x 4.3 cm
Weight	3.66 kg
Localisation	European Union, United Kingdom
Designed For	P/N: AGM734-10000S, AXC763-10000S, AXM761-10000S, AXM762-10000S, AXM763-10000S, AXM764-10000S, AXM765-10000S, G728TXPAV-10000S, G752TXPAV-10000S, GS728TXAV-10000S, GS752TXAV-10000S

Technical data © 1WorldSync. Subject to technical modifications and errors.