


Netgear M4350 Series M4350-32F8V

Switch - L3 - Managed - 32 x 10 Gigabit SFP+ + 8 x 25 Gigabit SFP28 - front to back airflow - rack-mountable

Group	Network Equipment
Manufacturer	Netgear
Manufacturer item no.	XSM4340FV-100NES
EAN/UPC	0606449165166

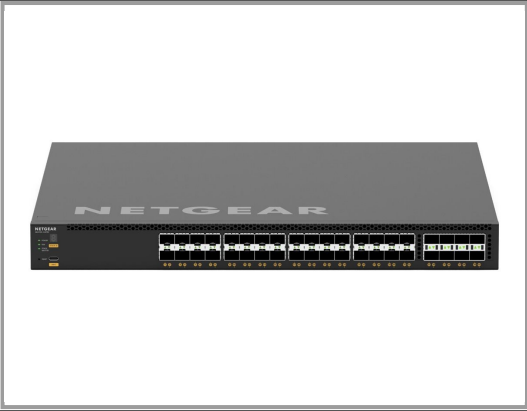

Description

NETGEAR M4350 Series M4350-32F8V - Switch - L3 - Managed - 32 x 10 Gigabit SFP+ + 8 x 25 Gigabit SFP28 - front to back airflow - rack-mountable

Main features

Product Description	NETGEAR M4350 Series M4350-32F8V - switch - 40 ports - Managed - rack-mountable
Device Type	Switch - 40 ports - L3 - Managed - stackable
Enclosure Type	Front to back airflow rack-mountable 1U
Subtype	10 Gigabit Ethernet
Ports	32 x 10 Gigabit SFP+ + 8 x 25 Gigabit SFP28
Performance	Routing/switching capacity: 1.04 Tbps Throughput (64-byte packet size): 773.76 Mpps 25 Gbps average latency (64-byte packets): < 1.08 µs Latency (10 Gbps): < 1.27 µs
Capacity	Packet buffer size: 64 Multicast entries (IPv4): 256 Multicast entries (IPv6): 16 VLANs supported: 4000 Jumbo frame size: up to 12000 IGMP multicast groups: 2000 DHCP users: 2000 ARP entries: 4000 NDP entries: 512
MAC Address Table Size	16K entries
Routing Protocol	Policy-based routing (PBR), RIP, VRRP, OSPF, PIM-DM, PIM-SM, PIM-SSM, IGMP, IGMPv3, MLDv2, RSTP
Remote Management Protocol	SNMP, HTTPS, CLI, Telnet, SSH, MIB, RSTP, DHCP, RMON
Features	Jumbo Frames support, LLDP-MED, RSPAN, PTPv2 TC support, MMRP, MVRP, BPDU, STRG, GMRP, GVRP, DAI, IP source guard, DHCPv4 server, DHCPv6 server, proxy ARP, sFlow, BOOTP support, ARP support, DoS attack prevention, DiffServ support, NSF, LACP, Quad-core CPU
Compliant Standards	IEEE 802.1as, IEEE 802.1Qav, IEEE 802.1Qat, IEEE 802.1ak
Power	AC 100-240 V

Dimensions (WxDxH)	44 cm x 40 cm x 4.32 cm
Weight	6.95 kg
Localisation	Europe, North America, United Kingdom

Technical data © 1WorldSync. Subject to technical modifications and errors.