


Philips 32BDL3550Q - 32" Diagonal Class (31.5" viewable)

Q-Line LED-backlit LCD display - digital signage - 1080p 1920 x 1080 - direct-lit LED

Group	Digitale Signage
Manufacturer	Philips
Manufacturer item no.	32BDL3550Q/00
EAN/UPC	8712581765323

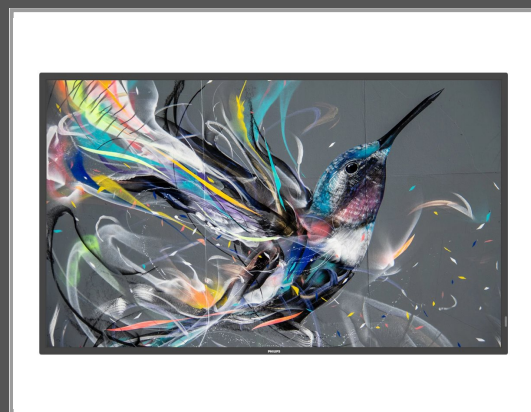

Description

Inform and enthrall with a Philips Q-Line Professional Full HD Display. This reliable solution can be up and running as quickly as you need.

Main features

Product Description	Philips 32BDL3550Q Q-Line - 32" Class (31.5" viewable) LED-backlit LCD display - Full HD - for digital signage
Product Type	LED-backlit LCD flat panel display
Diagonal Class	32"
Diagonal Size	31.5"
Commercial Use	Yes - digital signage
Resolution	1920 x 1080
Display Format	1080p
Input Video Formats	1080/60i, 480/60p, 720/60p, 1080/50i, 720/50p, 576/50p, 1080/50p, 1080/60p, 480/60i, 576/50i
Max Number of Screens	225
Video Interface	HDMI
HDMI Ports Qty	2 ports
Connectivity	LAN
PC Interface	DVI
Technology	VA
LCD Backlight Technology	Direct-lit LED
Image Aspect Ratio	16:9
TV Tuner	No tuner
Commercial Features	HTML5 support, FailOver
Picture Enhancements	3D Combfilter
Speaker System	2 speakers

Storage Capacity	8 GB
USB	Yes
Included Accessories	Remote control
Voltage	AC 120/230 V
Energy Class	Class G
Power Consumption Operational	50 Watt
Power Consumption (On mode)	50.1 W
Power Consumption Stand by	0.5 Watt
Dimensions (WxDxH) - without stand	72.65 cm x 6.91 cm x 42.54 cm
Weight	5.31 kg

Extended details

General	
Product Type	LED-backlit LCD flat panel display
Energy Class	Class G
Power Consumption Operational	50 Watt
Power Consumption (On mode)	50.1 W
Power Consumption SDR (On mode)	50.1 kWh/1000h
Diagonal Class	32"
Diagonal Size	31.5"
Commercial Use	Yes - digital signage
Series	Q-Line
TV Tuner	No tuner
TV Tuner Presence	No
Video Interface	HDMI
HDMI Ports Qty	2 ports
PC Interface	DVI
Modes	Landscape mode
Picture Enhancements	3D Combfilter
Dimensions	Without stand
Width	72.65 cm
Depth	6.91 cm
Height	42.54 cm
Weight	5.31 kg

	Display
LCD Display Technology	VA
Resolution	1920 x 1080
Display Format	1080p
Image Aspect Ratio	16:9
LCD Backlight Technology	Direct-lit LED
Image Contrast Ratio	4000:1
Dynamic Contrast Ratio	500000:1
Brightness	350 cd/m ²
Viewing Angle	178 degrees
Viewing Angle (Vertical)	178 degrees
Pull-Down Compensation	3:2, 2:2
Response Time	8 ms
Display Menu Language	Chinese (traditional), Chinese (simplified), English, German, French, Italian, Polish, Russian, Spanish, Turkish, Arabic, Japanese
Commercial Features	HTML5 support, FailOver
Operation Hours / Days	18 / 7
Features	3D MA deinterlacing, DICOM support, picture in picture (no tuner)
	Video Wall
Max Number of Screens	225
	Stands & Mounts
Flat Panel Mount Interface	200 x 200 mm
VESA Compatibility	Yes
	Video Features
Input Video Formats	1080/60i, 480/60p, 720/60p, 1080/50i, 720/50p, 576/50p, 1080/50p, 1080/60p, 480/60i, 576/50i
Supported Computer Resolutions	1024 x 768 (XGA), 640 x 480 (VGA), 800 x 600 (SVGA), 832 x 624, 1280 x 1024 (SXGA), 1600 x 1200 (UXGA), 1152 x 864, 1280 x 720, 720 x 400, 1152 x 870, 1680 x 1050 (WSXGA+), 1920 x 1080, 1440 x 900, 1280 x 800
	Media Player
Supported Video Formats	H.264, H.263, MPEG, H.265, VP8
Supported Audio Formats	AAC, HE-AAC
Supported Pictures Formats	BMP, PNG, JPEG
USB Port	Yes

Configuration	ARM Cortex-A73 Dual-Core + ARM Cortex-A53 Dual-Core - 2 GB - 8 GB
Operating System	Android OS 8.0
	Remote Control
Type	Remote control
Battery Included	Yes
	Audio System
Speaker System	2 speakers
Output Power / Total	20 Watt
Speakers	2 x speaker - 10 Watt
	Network & Internet Multimedia
Functionality	WEB browsing
Connectivity	LAN
	Connections
Connector Type	2 x HDMI input DVI-D input USB 2.0 Audio line-in Audio line-out Remote control RS-232C input RS-232C output Infrared input Infrared output
	Miscellaneous
Cables Included	RS-232 cable HDMI cable IR sensor cable
Compliant Standards	FCC Class A certified, VCCI, BSMI, CB, ETL, DICOM Part 14, EPA, CU
	Power
Power Device	Power supply
Input Voltage	AC 120/230 V
Power Consumption Stand by	0.5 Watt
Features	Smart power
	Manufacturer Warranty
Service & Support	Limited warranty - 3 years
	Environmental Parameters
Min Operating Temperature	0 °C
Max Operating Temperature	40 °C
Humidity Range Operating	20 - 80%

Technical data © 1WorldSync. Subject to technical modifications and errors.