


RUIJIE Networks RG-ES124G-L, Unmanaged, L2, Gigabit Ethernet (10/100/1000), Full duplex, Rack mounting

24-Port 10/100/1000 Mbps Unmanaged Non-PoE Switch

Group	Network Equipment
Manufacturer	RUIJIE
Manufacturer item no.	RG-ES124G-L
EAN/UPC	6971693279223

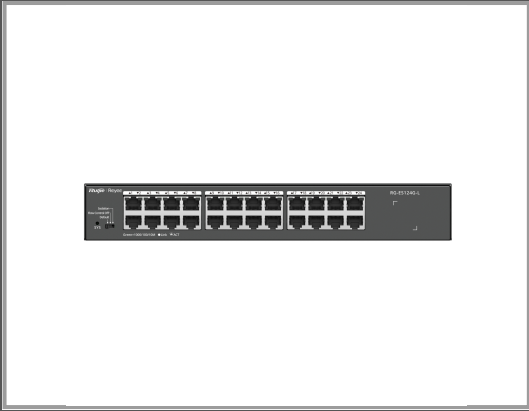

Description

Unmanaged Switch, Which Is Visible on Ruijie Cloud *

* If an unmanaged switch needs to be visualized on Ruijie Cloud, at least one managed switch needs to be deployed on the same network

Secure and Stable CCTV Network

Flow control and port isolation, ensuring reliability and security

Better Quality Design

Adhering to strict standards in PCB design and component selection

Main features

	General
Switch type	Unmanaged
Switch layer	L2
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Basic switching RJ-45 Ethernet ports quantity	24
Full duplex	Yes
MAC address table	8000 entries
Switching capacity	48 Gbit/s
Rack mounting	Yes

Extended details

	Design
Rack mounting	Yes
Product colour	Black
Housing material	Metal
LED indicators	Yes

	Management features
Switch type	Unmanaged
Switch layer	L2
	Ports & interfaces
Basic switching RJ-45 Ethernet ports quantity	24
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Installed SFP modules quantity	0
Installed SFP+ modules quantity	0
	Power over Ethernet (PoE)
Power over Ethernet (PoE)	No
	Data transmission
MAC address table	8000 entries
Switching capacity	48 Gbit/s
Forwarding rate	35.7 Mpps
Jumbo frames support	Yes
Jumbo frames	10000
	Network
10G support	No
Full duplex	Yes
Half duplex	Yes
Flow control support	Yes
Auto MDI/MDI-X	Yes
	Power
Power source	AC
Power supply included	Yes
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Input current	0.6 A
	Operational conditions
Operating temperature (T-T)	0 - 45 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90 %
Storage relative humidity (H-H)	5 - 95 %
Operating altitude	-500 - 5000 m
	Weight & dimensions
Width	280 mm

Depth	125 mm
Height	43.6 mm
Weight	1.12 kg
Performance	
Flash memory	4 MB
Mean time between failures (MTBF)	200000 h