


Reyee Ruijie Networks RG-ES210GS-P, Managed, L2, Gigabit Ethernet (10/100/1000), Power over Ethernet (PoE), Rack mounting

10-Port Gigabit Smart Cloud Managed PoE Switch

Group	Network Equipment
Manufacturer	Reyee
Manufacturer item no.	RG-ES210GS-P
EAN/UPC	6971693275829

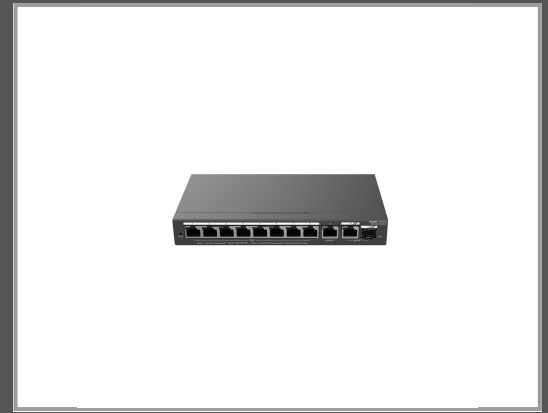

Description

Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

Automatic Loop Prevention Ensures Service Continuity

Network stays connected when network loop happens.

Cloud, Make Your Business Easy

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost

Main features

	General
Switch type	Managed
Switch layer	L2
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Basic switching RJ-45 Ethernet ports quantity	10
MAC address table	4000 entries
Switching capacity	20 Gbit/s
Networking standards	IEEE 802.3af, IEEE 802.3at
Power over Ethernet (PoE)	Yes
Rack mounting	Yes

Extended details

	Design
Rack mounting	Yes

Stackable	Yes
Product colour	Black
Reset button	Yes
Management features	
Switch type	Managed
Switch layer	L2
Web-based management	Yes
Cloud-managed	Yes
Ports & interfaces	
Basic switching RJ-45 Ethernet ports quantity	10
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
SFP module slots quantity	2
Power over Ethernet (PoE)	
Power over Ethernet (PoE)	Yes
Power over Ethernet plus (PoE+) ports quantity	8
Total Power over Ethernet (PoE) budget	120 W
Data transmission	
MAC address table	4000 entries
Switching capacity	20 Gbit/s
Forwarding rate	14.8 Mpps
Packet buffer memory	4.1 MB
Network	
Networking standards	IEEE 802.3af, IEEE 802.3at
10G support	No
Flow control support	Yes
VLAN support	Yes
Number of VLANs	16
Power	
Power source	AC/DC/PoE
AC input voltage	100 - 240 V
Input current	0.6 A
Power consumption (typical)	443 W
Security	
DHCP features	DHCP client, DHCP snooping
IGMP snooping	Yes

Packaging data	
Cables included	Power
Quick start guide	Yes
Package width	539 mm
Package depth	406 mm
Package height	114 mm
Package weight	4.2 kg
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90 %
Storage relative humidity (H-H)	5 - 95 %
Operating altitude	-500 - 5000 m
Weight & dimensions	
Width	202 mm
Depth	108 mm
Height	28 mm
Weight	1.38 kg
Performance	
Noise level	45 dB
Mean time between failures (MTBF)	200000 h